



4.1 How To Connect to Crestron System

NovoDisplay can be controlled by a **Crestron** System. Follow the instructions below to connect to the **Crestron** System.


Step 1. Click **Presentation** in the bottom right.

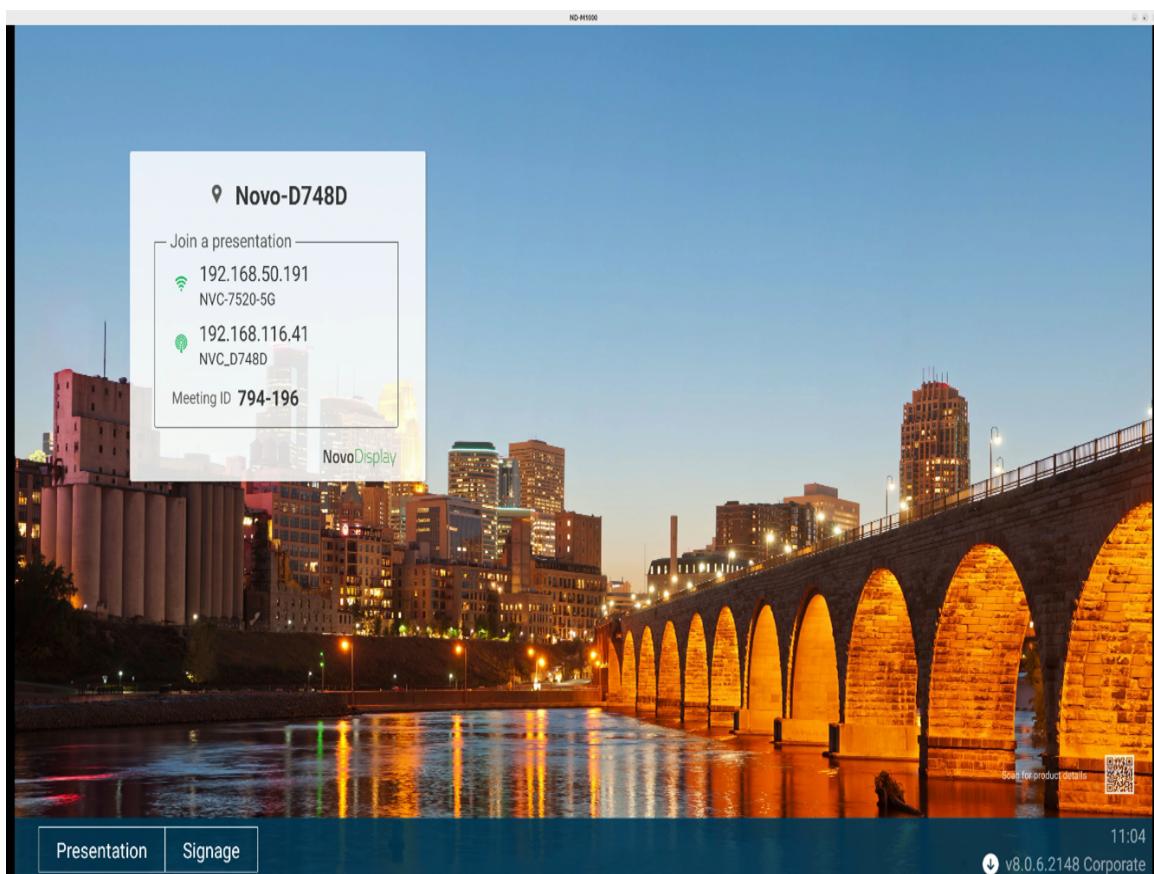


Step 2. From the menu, select **Settings**.

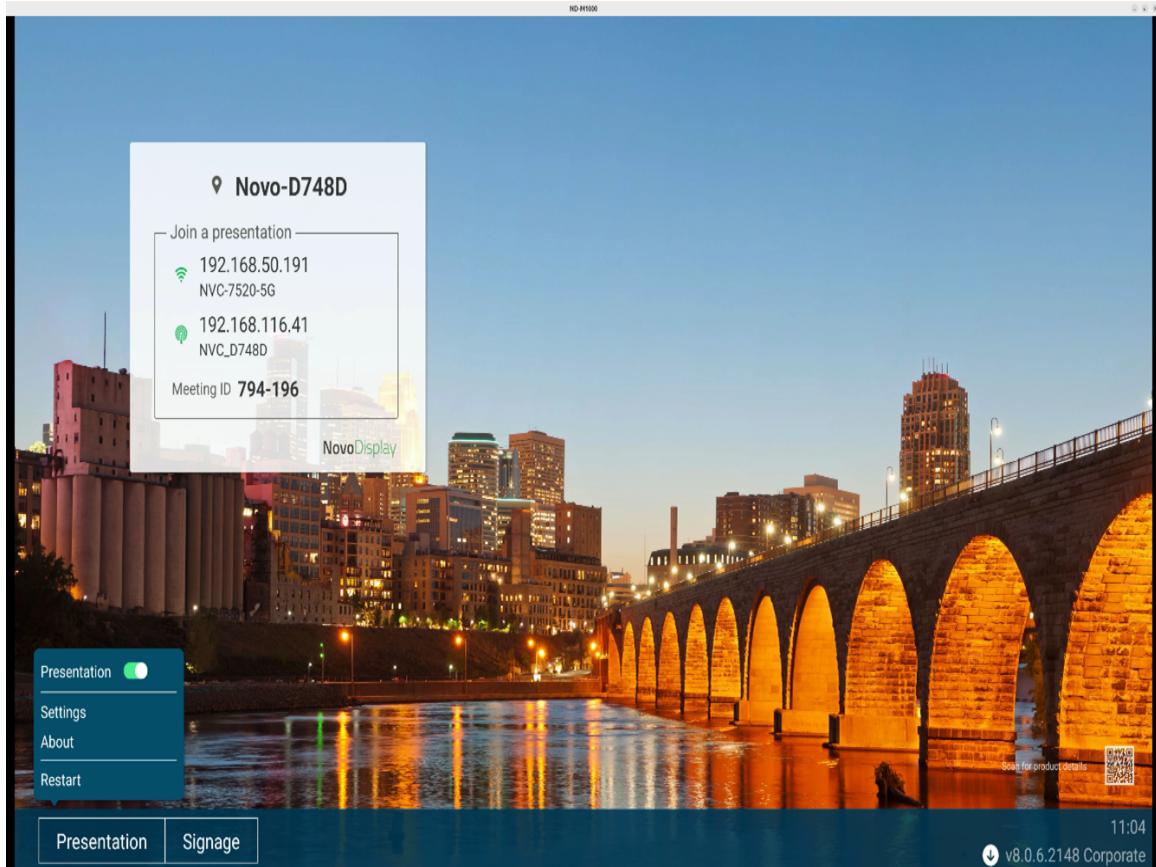


Step 3. From the Setting menu, select **Device Settings**.

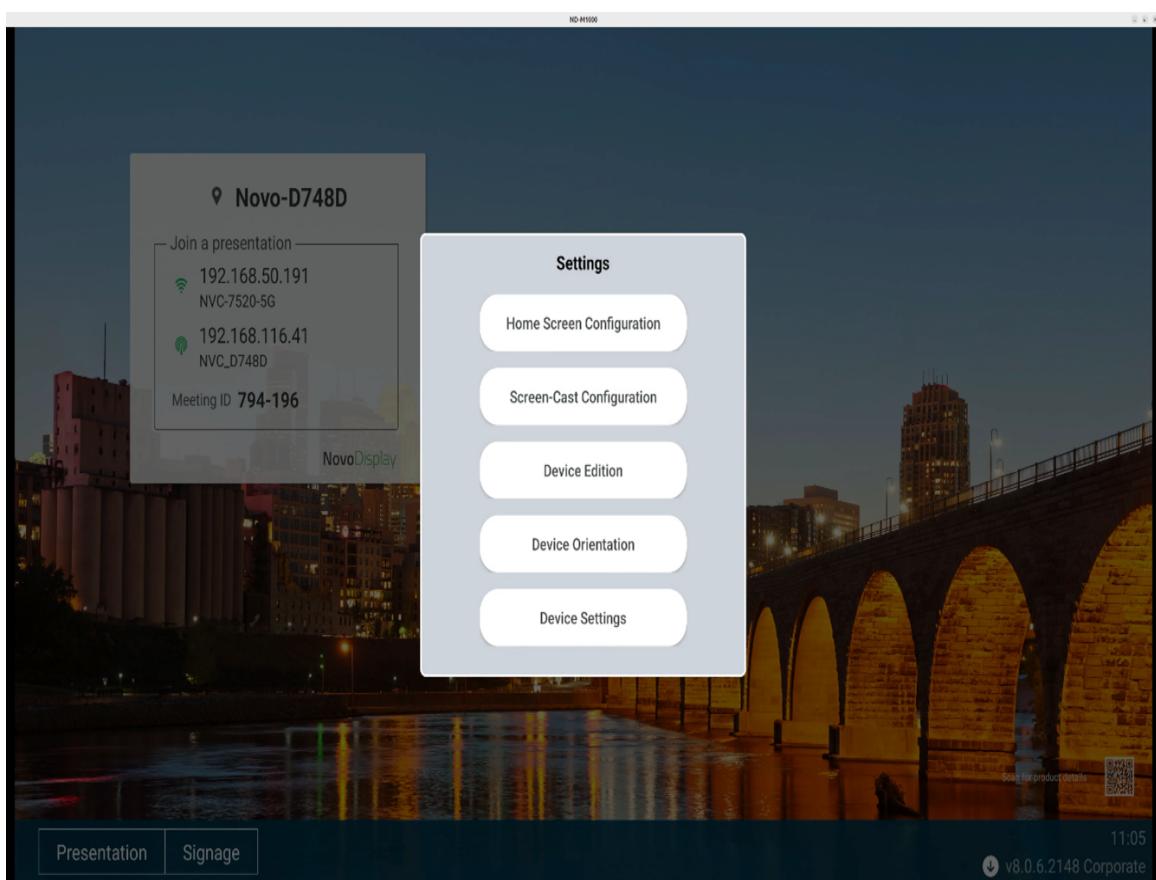

Step 4. Click **General** to enter the General Settings.

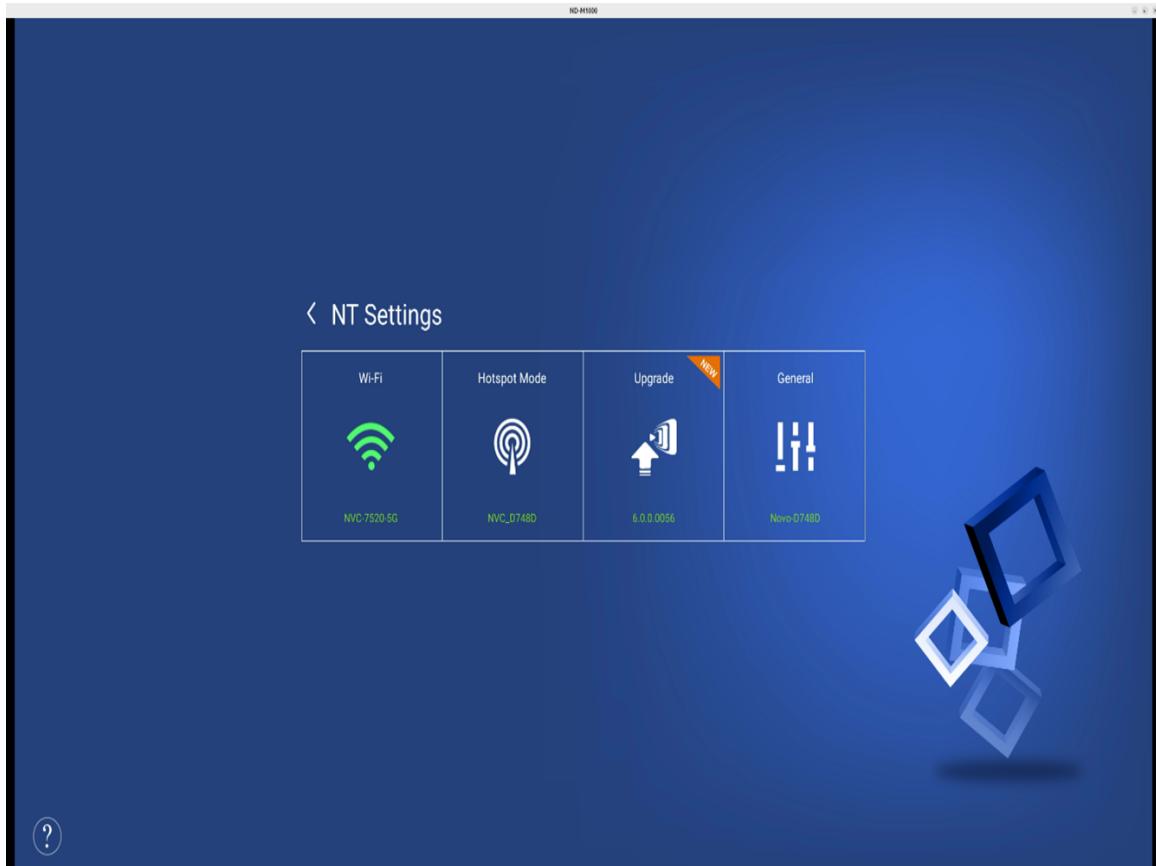


Step 5. On the General Settings page, click **Configure** to enter the **Crestron** configuration.

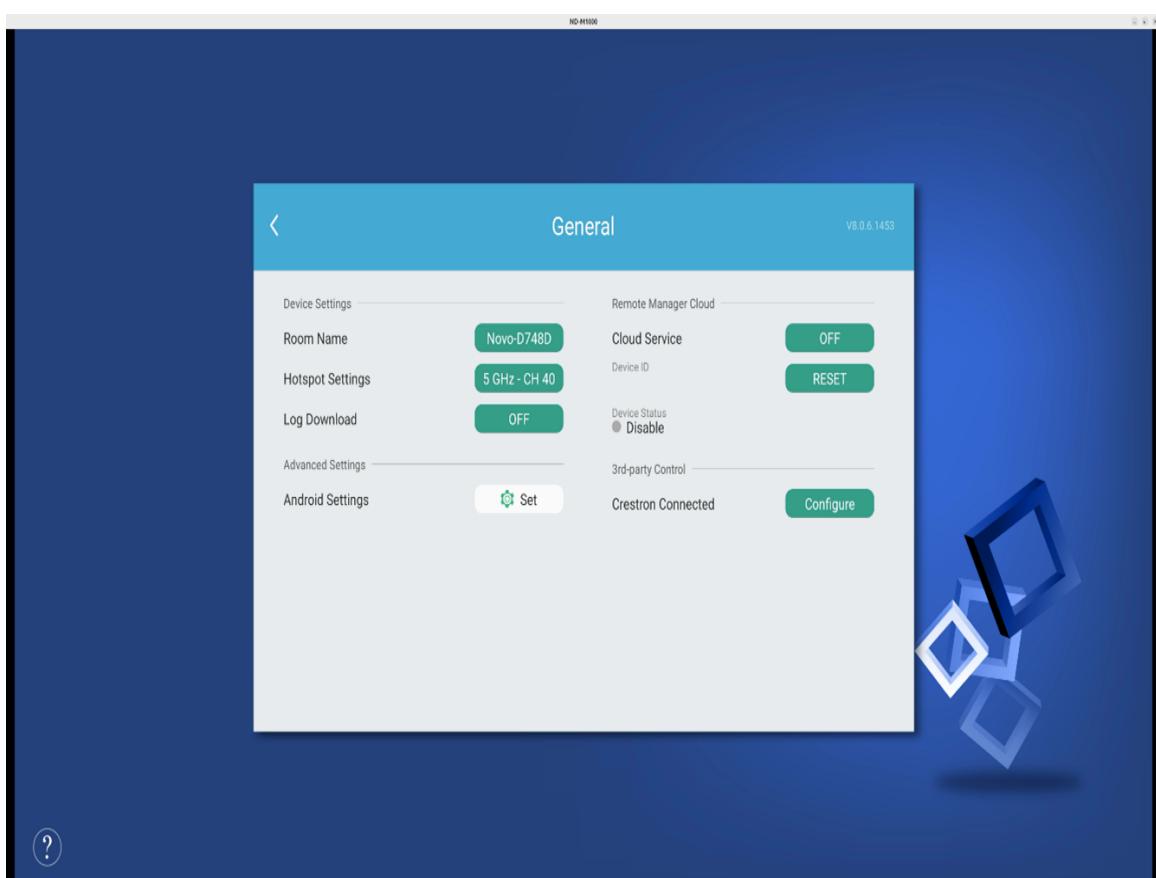


Step 6. There are two ways to connect to a **Crestron** system: **Crestron Cloud Xi0** and a **local Crestron system**.

On the Settings page, the first tab is **Xi0**. Fill in the required information, then click **Apply** to connect to **Crestron Xi0**.

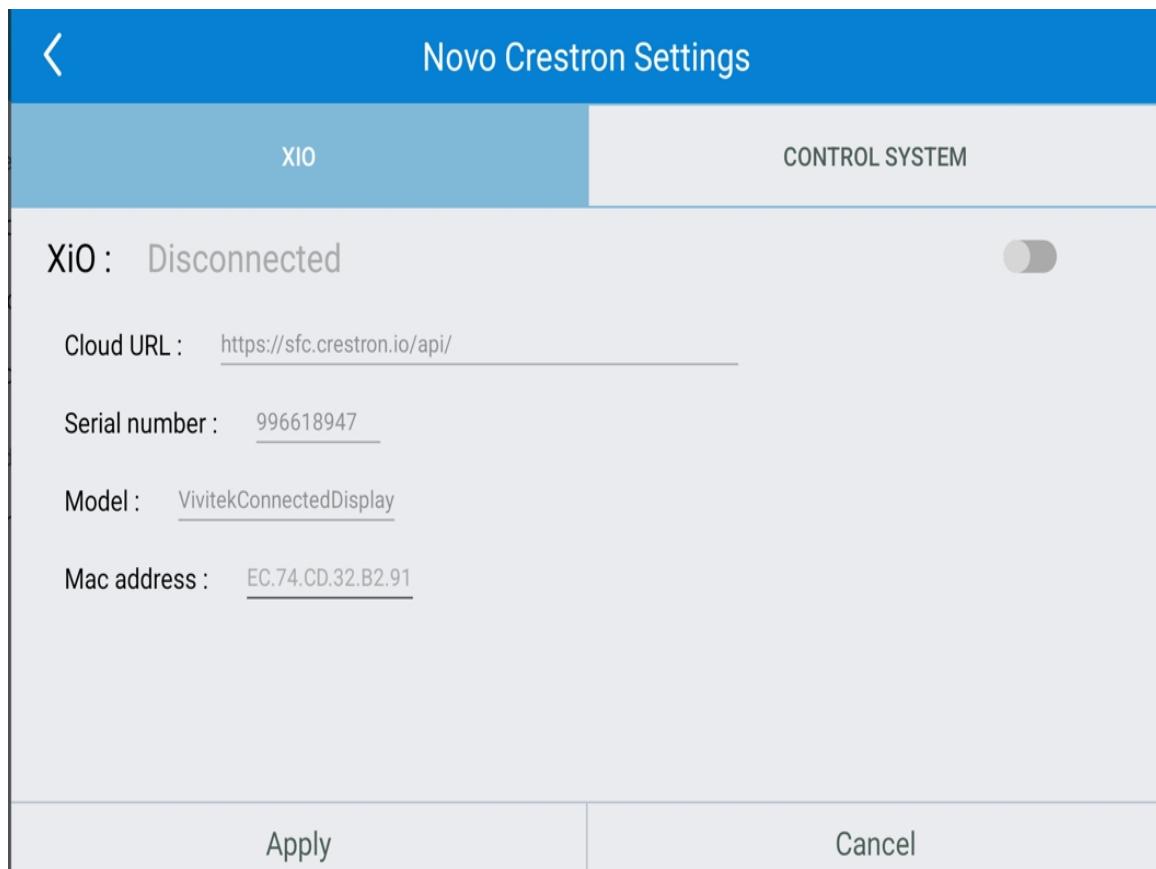

Step 7. The second tab is **Control System**. Fill in the required information or enable **Auto Discover**, then click **Apply** to connect to a **local Crestron system**.

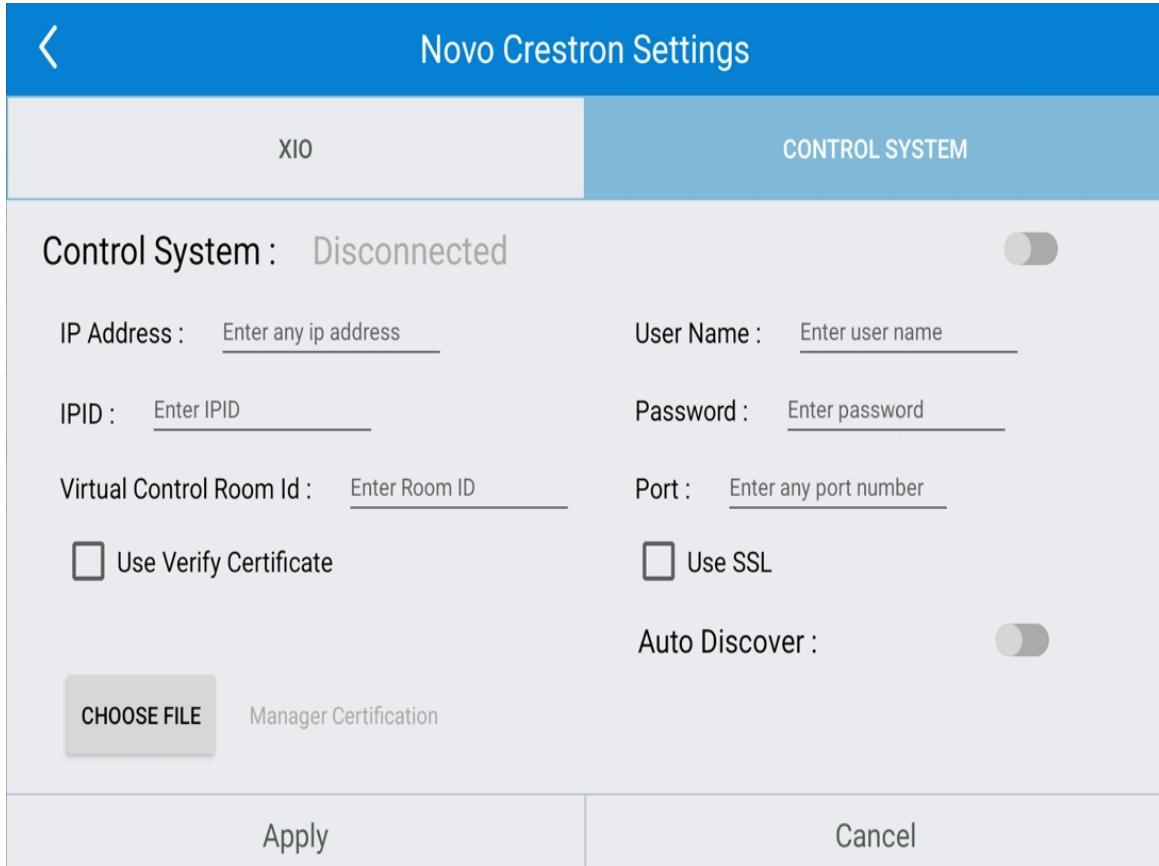A screenshot of the 'Novo Crestron Settings' interface. The top navigation bar has a back arrow on the left and the title 'Novo Crestron Settings' in the center. Below the title is a tab bar with 'XIO' on the left and 'CONTROL SYSTEM' on the right, with 'CONTROL SYSTEM' being the active tab. The main content area is titled 'Control System : Disconnected' with a toggle switch to its right. It contains several input fields: 'IP Address : Enter any ip address', 'User Name : Enter user name', 'IPID : Enter IPID', 'Password : Enter password', 'Virtual Control Room Id : Enter Room ID', and 'Port : Enter any port number'. There are two checkboxes: 'Use Verify Certificate' and 'Use SSL'. Below these is an 'Auto Discover' toggle switch. At the bottom left is a 'CHOOSE FILE' button, and at the bottom right are 'Apply' and 'Cancel' buttons. A note above the 'Manager Certification' section says 'Manager Certification'.

XIO	CONTROL SYSTEM
Control System : Disconnected 	
IP Address : <input type="text" value="Enter any ip address"/>	User Name : <input type="text" value="Enter user name"/>
IPID : <input type="text" value="Enter IPID"/>	Password : <input type="text" value="Enter password"/>
Virtual Control Room Id : <input type="text" value="Enter Room ID"/>	Port : <input type="text" value="Enter any port number"/>
<input type="checkbox"/> Use Verify Certificate	<input type="checkbox"/> Use SSL
Auto Discover : 	
CHOOSE FILE	Manager Certification
Apply	Cancel

Step 8. After the connection option is selected and the required information is filled in, the device will be connected to and controlled by the Crestron system.