



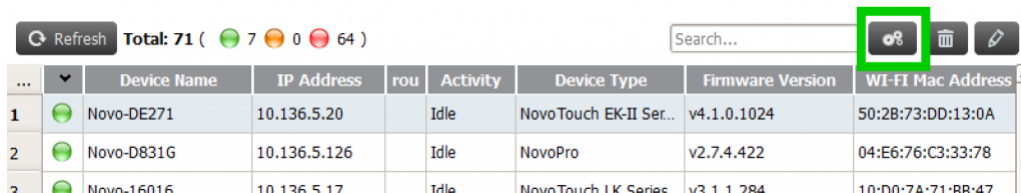
2.7 Use Remote Manager for installation

Launch **Remote Manager** software under the same local network with Novo device.

Go to the left top corner, click **+Device** > Input the Novo device's IP address to add the device into Remote Manager table.

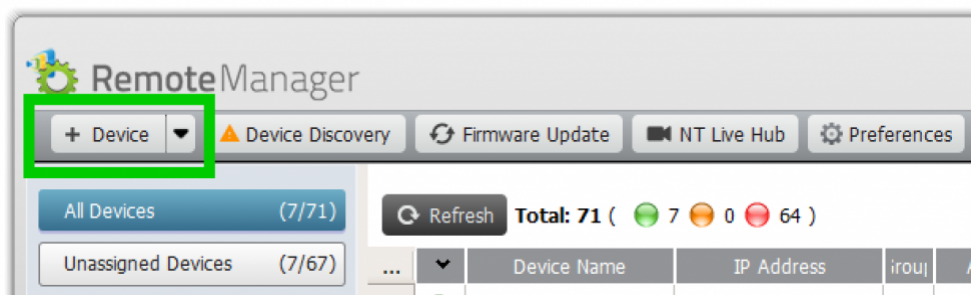

On the device list, click the device you want to configure, then click  to go to setup.



| ... | Device Name | IP Address | rou | Activity | Device Type | Firmware Version | WI-FI Mac Address |
|-----|-------------|--------------|-----|----------|-----------------------|------------------|-------------------|
| 1 | Novo-DE271 | 10.136.5.20 | | Idle | NovoTouch EK-II Ser.. | v4.1.0.1024 | 50:2B:73:DD:13:0A |
| 2 | Novo-D831G | 10.136.5.126 | | Idle | NovoPro | v2.7.4.422 | 04:E6:76:C3:33:78 |
| 3 | Novo-16016 | 10.136.5.17 | | Idle | NovoTouch LK Series | v3.1.1.284 | 10:D0:7A:71:BB:47 |

IT can control the devices remotely, such as setup device name, remote upgrade, change system language and time zone, download log file remote for troubleshooting and so on for individual Novo device.

Novo-B5CADE271 (10.136.5.20)

General Network Security Misc.

Device Name [← Apply](#)

Model NT-C2100-WFS0860

Edition Corporate

App Version v4.1.0.1024 [↻ Online Update](#)

Build Version NovoTouch-C2100-0049

Software Edition C2100-WW-CORP-EDU

Online Users 0

[↻ Refresh](#) [Close](#)

General settings

Novo-B5CADE271 (10.136.5.20)

General Network Security Misc.

Wi-Fi Mode HotSpot [🔗 Configure Wi-Fi](#)

SSID NVC_DE271

Wi-Fi IP 192.168.43.1 [📶 Network Routing](#)

LAN IP 10.136.5.20

Wi-Fi Mac Address 50:2B:73:DD:13:0A

LAN Mac Address C0:8A:CD:DE:E5:30

[↻ Refresh](#) [Close](#)

Network settings

Novo-B5CADE271 (10.136.5.20)

General Network Security Misc.

Screen-Cast Configuration

☒ Enable Google Cast [← Apply](#)


☒ Enable AirPlay [← Apply](#)

☐ Enable AirPlay Code [← Apply](#)

☐ PIN Required [← Apply](#)



[↻ Refresh](#) [Close](#)



Security settings

 Novo-B5CADE271 (10.136.5.20)

General Network Security **Misc.**



Display

Language English  


Time Zone Pacific Time (GMT-7:00)  

NTP Settings


System Time 2020/06/30 02:02:56 PDT

NTP Server 2.android.pool.ntp.org  


Log Download



☐ Enable Log Download 

Restart Device



Configure Device



 Refresh 

Settings for System Language, Time Zone, NTP Server, Log File Download, Remote Reboot, Upload Config File.