


4. ADD DEVICES VIA AUTO DISCOVERY


For organizations that deploys a large number of NovoConnect devices, adding a device via auto discovery can save a lot of effort. This function allows IT staff to create and install a custom configuration file to automatically configure NovoConnect's settings via a microSD card.

Generate "NovoAutoConfig.xml" configuration file

1. Choose "Device Discovery" and then click "Generate AutoConfig File ...", as illustrated in the figure below.

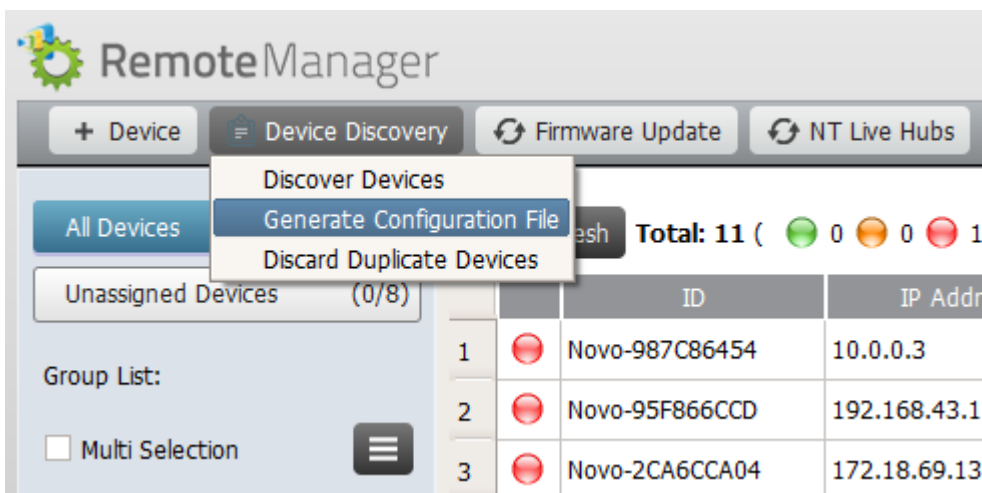

1. Follow the on-screen instructions to complete the configuration parameters.

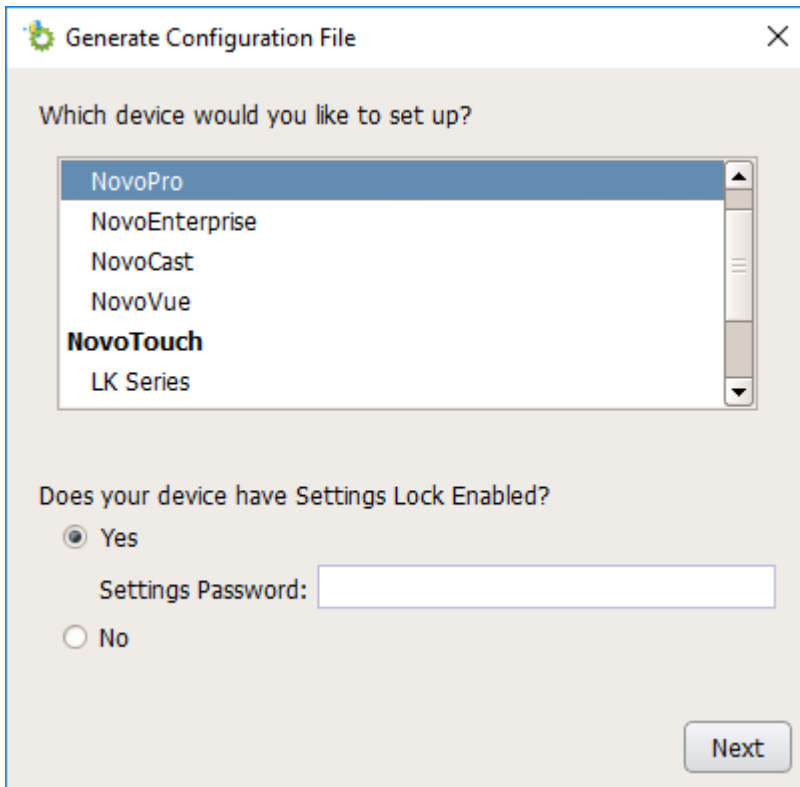

1. The following window will appear and you need to work with your organization's IT staff to obtain the appropriate values for each item, and click on "Save..." to save file "NovoAutoConfig.xml" to a microSD card.

Generate Configuration File X

NovoPro - Settings Lock Disabled

General

Edition:

Time Zone:

Language:

Settings Password:

WiFi

Security:

SSID:

Screen-Cast Configuration

Google Cast:

AirPlay:

PIN Required:

Remote Manager

IP Address:

Port Number:

Report Period: Seconds

Note: Regarding "Port Number" in the figure above, you can change it via menu "Preference", as illustrated below.

RemoteManager V 2.2.1.101 | © 2015 Delta Electronics, Inc. All Rights Reserved.

+ Device | Device Discovery | Firmware Update | **Preferences**

All Devices (7) | Refresh

Unassigned Devices (2)

Group List: + Group

- Admin Building (2)
- Campus A (2)
- Others (1)

ID	IP Address	Group	Description
Room Explorer		Campus A	
Room Discovery		Campus A	
Admin Hallway A		Admin Building	
Admin Hallway B		Admin Building	
Classroom 101		Others	
Classroom 102	192.168.2.24		
Meeting Room Bilbao	192.168.1.2		

System Preferences


Language:

Remote Manager

Port Number:

Apply the configuration to a NovoConnect device:

1. Insert the microSD card with NovoAutoConfig.xml file to a NovoConnect device, and then the following pop-up will appear on the home screen of the NovoConnect device. There is a 30-second timeout window that you can verify the parameters are set with the proper values. Then the device will be configured with those new settings automatically.

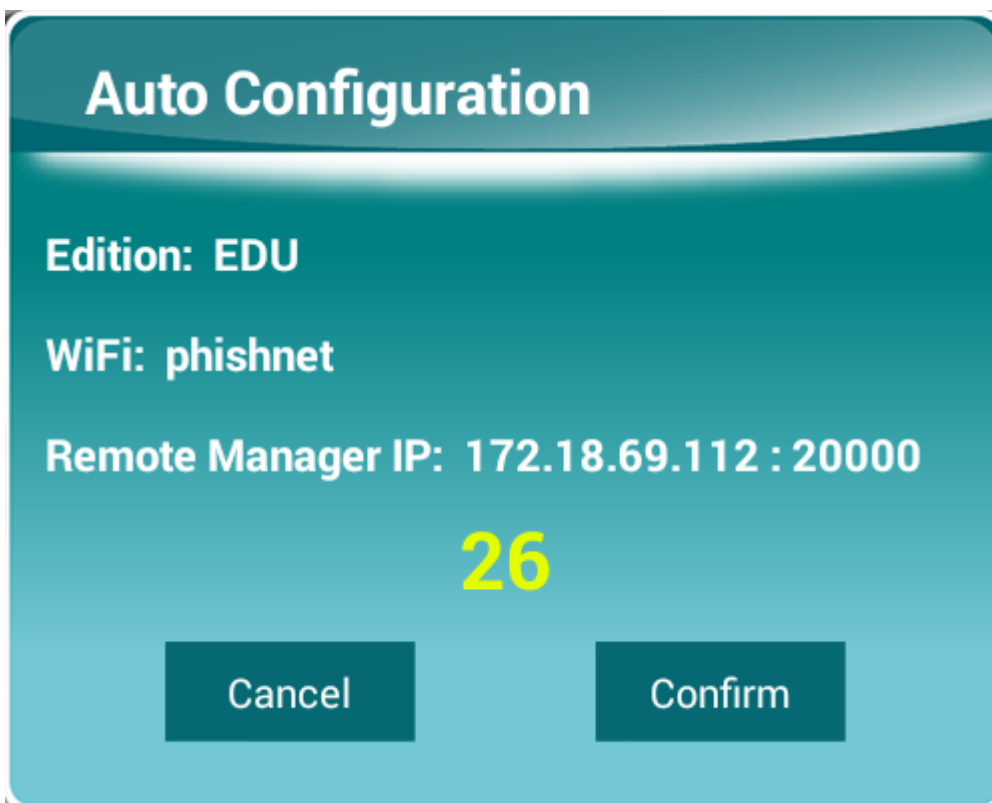

1. After the new settings take effect, the NovoConnect device will automatically report its existence to the Remote Manager. You can click on “Device Discovery” and then “Discover Devices” to bring up a discovery dialog window, where you will be able to view live NovoConnect devices and add them to the device list of the Remote Manager.

RemoteManager

+ Device Device Discovery Firmware Update Preferences V 2.2.1.101 | © 2015 Delta Electronics, Inc. All Rights Reserved.

All Devices (6)

Unassigned Devices

Group List:

- Admin Building (2)
- Campus A (2)
- Others (1)

Reporting Devices Server [192.168.2.7:20142, 172.18.69.112:20142]

Refresh Export ... Add

	ID	Name	Version	Mac Address	WIFI Mode	SSID	WIFI IP Address	LAN IP Address
<input type="checkbox"/>	Novo-17D76C703	Novo-6C703	v2.2.0.159	04:E6:76:BC:C6:39	WIFI Client mode	phishnet		172.18.69.124

<
Back