


# 4.8 Generate Configuration File

Generating a configuration file allows you to create an XML file that includes settings for a device's password, time zone, Wi-Fi connection information (SSID, Password, etc.), and NovoDS Cloud login information, which can then be stored on a microSD or USB drive and quickly deployed to any other device which you want to have the same settings.

To generate a configuration file:

1. Click button **Generate Configuration File**

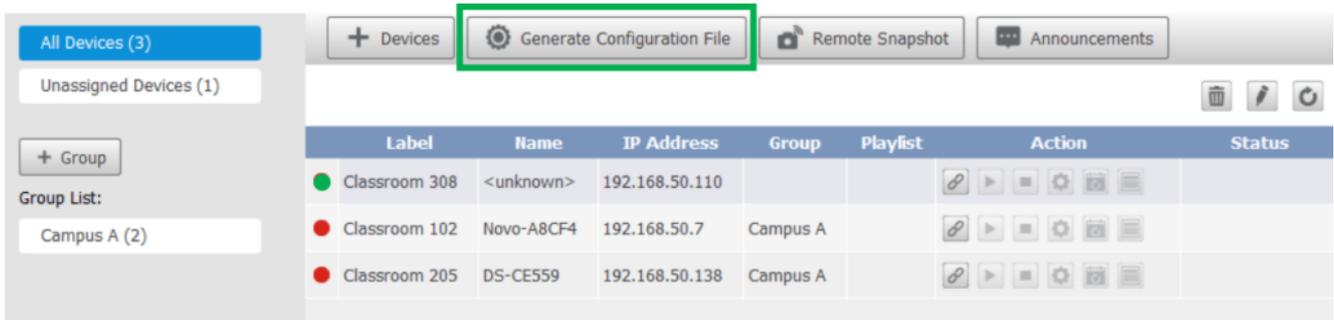

2. In the **Configuration** pop-up window, fill out all the settings you want to deploy to other devices and then click **Save...** and navigate to the folder in your local storage where you want to save the XML file.

The image shows a 'Configuration' window with a close button (X) in the top right corner. The window is divided into three sections: 'General', 'WiFi', and 'NovoDS Cloud'. The 'General' section contains a 'Settings Password' text field and a 'Time Zone' dropdown menu set to 'Marshall Islands (GMT+12:00)'. The 'WiFi' section contains a 'Security' dropdown menu set to 'None', and three text fields for 'SSID', 'Identity', and 'Password'. The 'NovoDS Cloud' section contains a checkbox for 'Default Web Address(URL)', a 'Web Address (URL)' text field with the example 'https://www.novods.com', and an 'Organization ID' text field. A 'Save...' button is located at the bottom right of the window and is highlighted with a green border.

3. Copy the XML file onto a microSD or USB flash drive and then inserting the drive into the device you want to configure. Once inserted, wait about 20 seconds until a pop-up message appears on the device confirming the configuration. You can then remove the drive from the device and then proceed to the next device you want to configure.