

3.1 Home Screen

When you turn on NovoDisplay, you will see the following home screen.



No.	Item	Description
1	Device Name	For user to identify which Novo device is going to be projected the screens of their device (PC, tablet or smartphone) wirelessly for presentations.
2	Ethernet IP address	Connect and share screen by this IP address.
3	Hotspot SSID and WiFi IP address	User can connect this hotspot SSID to share their screen via AirPlay, Google Cast and NovoConnect APP.

4	Presentation Settings	Open Presentation settings which allows you to enable/disable wireless presentation feature, customize home screen, change screen-casting settings, show paired LauncherPlus, modify device Edition and device settings.
5	Signage Settings	Open Signage settings which allows you to enable/disable digital signage feature, change auto-play settings and enable/disable NovoDS.com cloud service.
6	Clock, Version and Edition	Show clock, firmware version and edition (corporation or education).


How to customize your home screen

To customize the home screen, connect a USB mouse to the device, and then click **Presentation > Home Screen Configuration**.

The screenshot shows a dialog box titled "Home Screen Configuration". It contains a list of settings, each with a checked checkbox:

- Name
- QR code
- Ethernet
- Native Mirroring Info
- Wi-Fi
- Signage Info
- Meeting ID
- How-to Present
- Launcher Dongle
- NovoConnect App
- Browser info
- Native Mirroring

At the bottom of the dialog, there are two buttons: "Apply" and "Cancel".

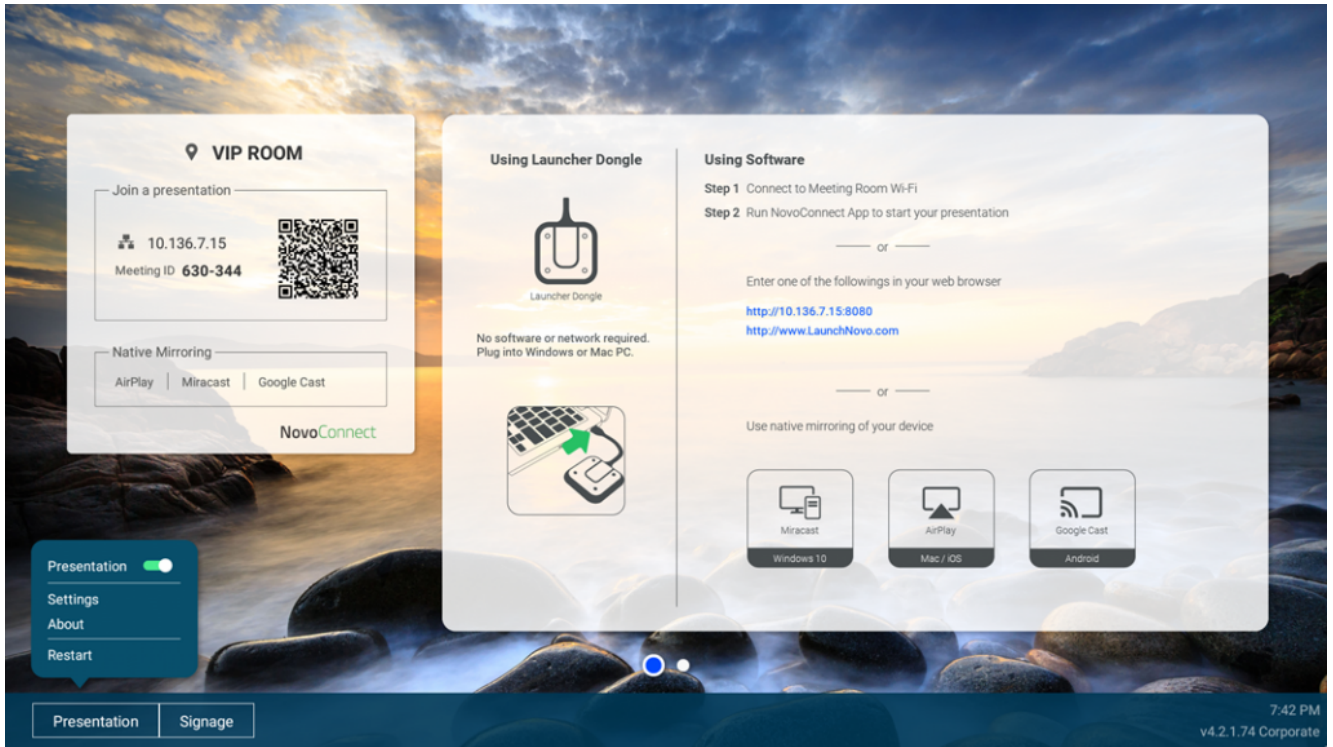

Tutorial Video