

3.1 Home Screen

When first time NovoConnect and NovoDisplay turn on, you will see the home screen as below.



No .	Item	Description
1	Device Name	For user to identify which Novo device is going to be projected the screens of their device (PC, tablet or smartphone) wirelessly for presentations.
2	Ethernet IP address	Connect and share screen by this IP address.
3	Hotspot SSID and WiFi IP address	User can connect this hotspot SSID to share their screen via AirPlay, Google Cast and NovoConnect APP.

4	Presentation Settings	Open Presentation settings which allows you to enable/disable wireless presentation feature, customize home screen, change screen-casting settings, show paired LauncherPlus, modify device Edition and device settings.
5	Signage Settings	Open Signage settings which allows you to enable/disable digital signage feature, change auto-play settings and enable/disable NovoDS.com cloud service.
6	Clock, Version and Edition	Show clock, firmware version and edition (corporation or education).

How to customize your home screen

Use USB mouse to connect the device, click **Presentation > Home Screen Configuration** to customize your home screen.

Home Screen Configuration

☒ Name

☒ QR code

☒ Ethernet

☒ Native Mirroring Info

☒ Wi-Fi

☒ Signage Info

☒ Meeting ID

☒ How-to Present

☒ Launcher Dongle


☒ NovoConnect App

☒ Browser info

☒ Native Mirroring

Apply

Cancel

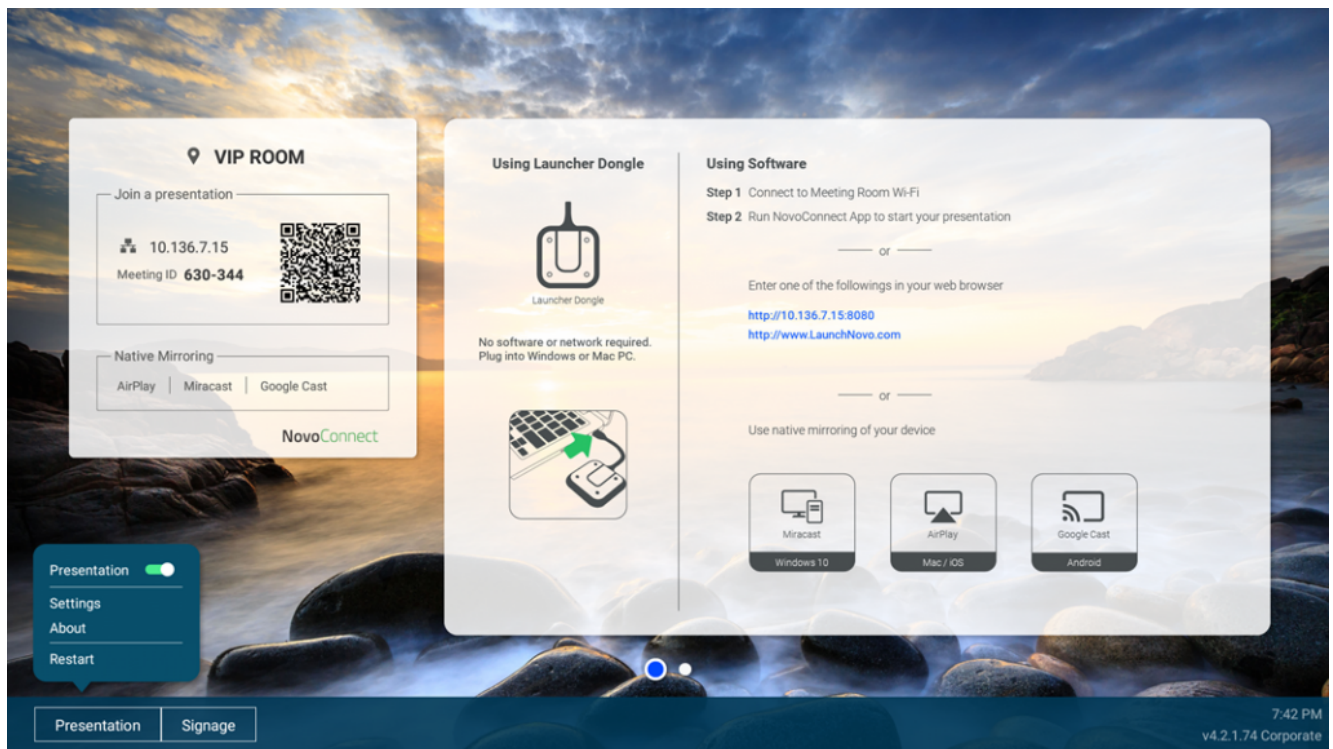

Tutorial Video